

# **2.4M REVERSIBLE** COMPOSITE FASCIA



Cladco Composite Fascia Boards feature a reversible design to match your Composite Decking project, concealing exposed Joists in a raised substructure. Fascia Boards can also be used to seal off any gaps in your Composite Cladding project, to prevent debris and pests from entering.

### COLOUR RANGE




#### BOARD SPECIFICATIONS

2.4m
146mm
10mm
4kg

## 


**FSC®** Certification

SA-COC-005542



www.cladcodecking.co.uk **T:** 01837 659901 **E:** info@cladco.co.uk



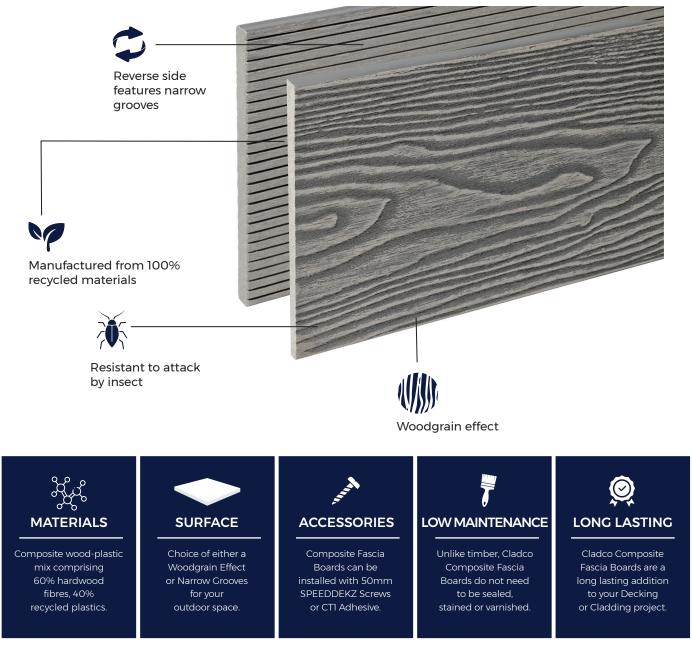

### **RECYCLED MATERIALS**

Cladco Composite Fascia Boards are manufactured using 100% recycled materials, reducing our impact on the environment. A mix of 60% recycled hardwood fibres and 40% recycled, post-consumer plastics provides each Board with low-maintenance and long-lasting benefits.

All Cladco Composite products are available as FSC® certified for the same cost. If you require FSC® certified products, please ask for these when placing your order.

## AFTERCARE

As a Composite material, Cladco Composite Fascia Boards will naturally accumulate dirt when exposed to outdoor conditions. For everyday debris such as plants, leaves, berries, or animal droppings, simply brush your Boards with a broom and warm, soapy water.

In cases of more stubborn dirt or grime, pressure washing may be necessary to restore the Board's appearance.





## DECKING INSTALLATION ADVICE

#### Screws


Composite Fascia Boards can be fixed to your Composite Decking or Joists using 50mm SPEEDDEKZ Deck Screws. The Screws need to be inserted 13mm away from the edge of your Fascia Board.

#### Adhesive

A strong adhesive, such as CTI, can be used to install Composite Fascia Boards. CTI comes in a range of colours to match your colour choice.

#### **Screws and Adhesive**

For the best results, use a combination of Screws and Adhesive for a superior finish. To do so, alternate between Adhesive and Screws every 150mm.

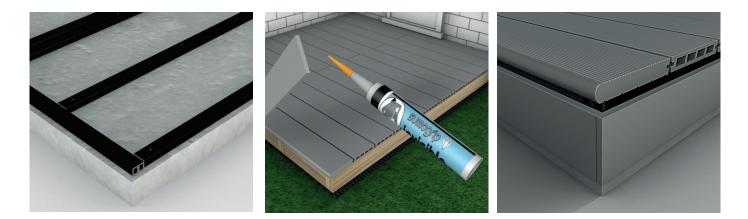

#### NATURAL WEATHERING

As Cladco Composite Fascia Boards contain natural wood elements, they will fade from weathering over time. This process is most noticeable within the first six months after installation.


Please be aware that the appearance of Composite Boards will change depending on weather conditions and, when wet, Boards will display a different tone compared to when they are dry.

For detailed information about installation, please read our Composite Decking Installation Guide.

#### **PRODUCT ACCESSORIES**















BULLNOSE BOARDS

CREWS CC

CORNER TRIM

SKIRTING TRIMS

**CTI ADHESIVE** 

www.cladcodecking.co.uk **T:** 01837 659901 **E:** info@cladco.co.uk

