




4M SOLID REVERSIBLE COMPOSITE DECKING

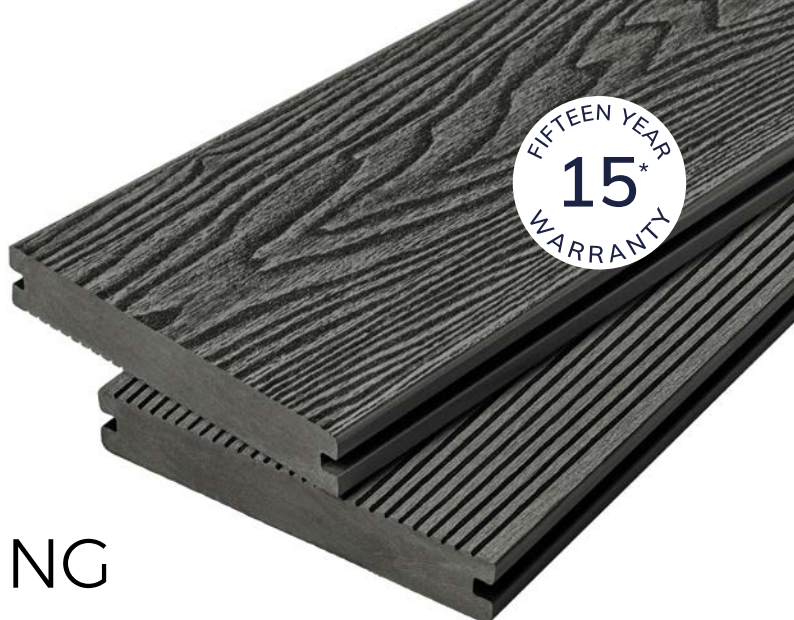

Cladco Solid Reversible Composite Decking provides greater sound absorption for busier decking spaces. Our commercial-grade Reversible Boards are available in 4m lengths and eight subtle colours, for a long-lasting outdoor solution. Composite Decking benefits from being low-maintenance, splinter and rot resistant.

COLOUR RANGE




BOARD SPECIFICATIONS

Length	4m
Width	150mm
Thickness	25mm
Coverage	0.6m ²
Weight	20.92kg

TEST CERTIFICATIONS

FSC® Certification	SA-COC-005542
Fire Rating	CFL - s1 (EN 13501-1:2018)
Slip Resistance	DRY - Low-slip potential (Narrow Groove side) WET - Moderate slip potential (Narrow Groove side)

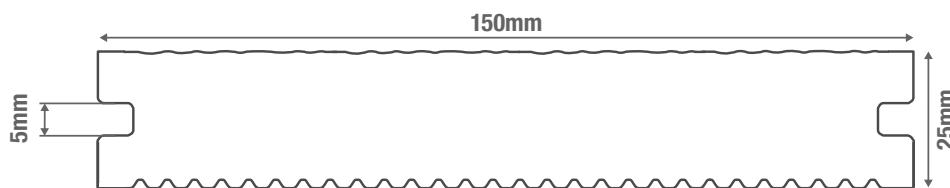



Woodgrain effect



Manufactured from 100% recycled materials



Solid construction for increased strength



Install using T-Clips or hidden Clip System



Narrow grooves provide a low-slip surface



MATERIALS

Composite wood-plastic mix comprising 60% hardwood fibres, 40% recycled plastics.



SURFACES

Choice of either a Woodgrain Effect or Narrow Grooves for your outdoor space.



ACCESSORIES

Complete your Cladco Decking® area with Composite Bullnose Boards and Trims.



LOW MAINTENANCE

Unlike timber, Cladco Composite Decking Boards do not need to be sealed, stained or varnished.



WARRANTY

Cladco Composite Decking is supplied with a 15-Year Warranty.

TEMPERATURE EXPANSION

Cladco Composite Decking Boards will naturally expand and contract with changing temperatures. To account for this, it is essential to follow our recommended guidelines when installing Boards, particularly where two Boards meet end-to-end at butt joints.

SPACING GUIDELINES FOR BUTT JOINTS:

7mm spacing at temperatures of 5°C and below
6mm spacing at temperatures between 5°C and 15°C
5mm spacing at temperatures of 15°C and above

RECYCLED MATERIALS

Cladco Composite Decking is manufactured using 100% recycled materials, reducing our impact on the environment. A mix of 60% recycled hardwood fibres and 40% recycled, post-consumer plastics

provides each Board with low-maintenance and long-lasting benefits.

All Cladco Composite products are available as FSC® certified for the same cost. If you require FSC® certified products, please ask for these when placing your order.


AFTERCARE

As a Composite material, Cladco Composite Decking Boards will naturally accumulate dirt when exposed to outdoor conditions. For everyday debris such as plants, leaves, berries, or animal droppings, simply brush your Decking with a broom and warm, soapy water. In cases of more stubborn dirt or grime, Cladco Ultimate Composite Decking Cleaner can be applied. This fast-acting foaming formula is an effective way to maintain your Decking. If stains persist, pressure washing may be necessary to restore the Decking appearance.

INSTALLATION ADVICE


Joist Spacing

Cladco Composite Decking Joists can be worked with normal woodworking tools and are easily fastened to a suitable supporting Joist substructure, installed with a maximum Joist spacing of 400mm.

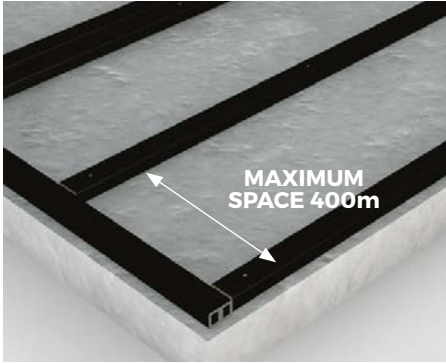

Starter Clips

Starter Clips need to be fixed to the end of the Composite Joists before laying the first Board. Leave a gap of 15mm between walls and Joists to allow for expansion.

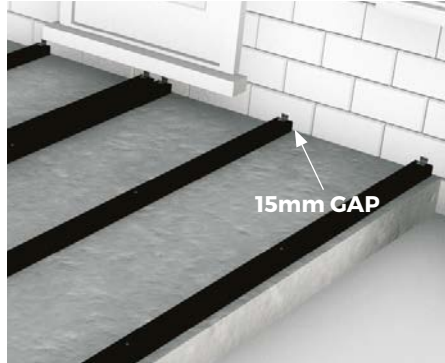

Butt Joints

Double joists must be installed at butt joints to provide adequate support for each Board end. Additionally, Fixing Clips must be used at each Board end, and Boards should never share a fixing clip.



Adhering to these guidelines will help ensure proper installation and longevity of your Composite Decking. Failure to follow these guidelines will invalidate the product's warranty.


NATURAL WEATHERING

As Cladco Composite Decking Boards contain natural wood elements, they will fade from weathering over time. This process is most noticeable within the first six months after installation.


Please be aware that the appearance of Composite Boards will change depending on weather conditions and, when wet, Boards will display a different tone compared to when they are dry.

For detailed information about installation, please read our Composite Decking Installation Guide.

PRODUCT ACCESSORIES



BULLNOSE BOARDS



FASCIA BOARDS




CORNER TRIMS



SKIRTING TRIMS



COMPOSITE JOISTS



RECYCLED PLASTIC JOISTS



STAINLESS STEEL CLIPS AND SCREWS

11 required per 4m Board



T-CLIP FIXINGS AND SCREWS

11 required per 4m Board



STAINLESS STEEL STARTER CLIPS