



Pictured - Blue Fibre Cement Wall Cladding Boards

# CLADCO FIBRE CEMENT WALL CLADDING AND TRIMS

Installation Guide,  
Aftercare and FAQs

**CLADCO**  
PROFILES



## CONTENTS

Storage and Warranty	3
Tools and Equipment	4
Preparing the Wall	5
Installing the Boards	6
Finishing around Doors and Windows	8
Installing the Trims	9
Aftercare and Maintenance	12
FAQs	13





Cladco Fibre Cement Wall Cladding Boards have been designed to last, manufactured with increased durability.

Each Board is designed to replicate the natural variants of traditional timber cladding. It is recommended to purchase all Boards required for the project at the same time, as this will ensure colour consistency within the batch and a single delivery cost. Please note that the Board colours can have slight variations within each batch. To avoid this it is recommended to buy all the Boards you need at once.

It is recommended to lay out all Cladco Fibre Cement Wall Cladding Boards before installation, to ensure the natural effect of grain, colour and tone is balanced across the whole of your Cladding project.



## STORAGE AND HANDLING

Cladco Fibre Cement Wall Cladding Boards should always be stored in a cool, dry, shaded spot, on a flat level surface with the entire Board supported. Ensure Boards are protected from the weather, dust, water and debris. It is recommend to store the Boards indoors.

Installing Cladco Fibre Cement Boards while wet increases the likelihood of efflorescence and butt ends shrinking. We recommend installing Boards in dry conditions only. Cladco Fibre Cement Wall Cladding Boards should always be moved and carried by two physically abled people, edge to edge, to prevent the Boards from bending, cracking or splitting. Take care when handling and moving the Fibre Cement Boards, and avoid bending or arching movements, as this can cause them to break.



## WARRANTY

Cladco Fibre Cement Wall Cladding Boards are supplied with a 10-year warranty subject to terms and conditions. Cladco Fibre Cement Wall Cladding Boards should be installed as per this Installation Guide. Failure to do so may invalidate the warranty. For further information, visit [www.cladcodecking.co.uk/cladcoprofiles-limited-conditions-sale](http://www.cladcodecking.co.uk/cladcoprofiles-limited-conditions-sale).

# TOOLS & EQUIPMENT

---



## Protective Equipment

When handling or carrying Cladco Fibre Cement Wall Cladding Boards, it is advised to wear long sleeves and gloves to protect any exposed skin. When cutting Boards, to protect yourself from the dust a Level P3 Respiratory Protective Mask must be worn. Ear defenders and safety glasses are also recommended. When handling aluminium Trims, it is advised to wear Cut Level 5 Protective Gloves to protect your hands from the sharp metal edges.



## Tool Set

Standard everyday DIY or carpentry tools such as a tape measure, spirit level, pencil and Stanley knife.



## Cutting Tools

Wet, low-speed and low-dust cutting tools are recommended, however, a standard wet circular saw blade with carbide teeth, or a hand-held wet circular saw with a diamond saw blade, will be able to cut through the material, if necessary. Cladco Straight Cut Tin Snips, or a metal hacksaw, can be used to cut through the aluminium Trims and Perforated Closures once measured.



## Staple Gun

Use a staple gun to fix the Damp Proof Course material into the Battens.



## Health and Safety

When working with Fibre Cement materials, it is imperative that proper care is taken and necessary precautions are met. When Fibre Cement Boards are cut, fine dust is released into the atmosphere - the mineral itself is harmless, however dangerous if inhaled and will constitute a health hazard. A Level P3 Respiratory Protective Mask should be worn when cutting the Boards.

# DO'S & DON'TS



Do not install Fibre Cement Wall Cladding if the Boards, building or the surrounding areas are wet



Do not cut the Fibre Cement Wall Cladding Boards indoors




Do not dry sweep dust or debris off the Boards, as it may cause the particles to enter the air and could be inhaled - wipe away with a damp cloth



Always follow the manufacturer's safety recommendations when using saws or other machinery




Nail guns can be used for fixing the Boards



Always carry Fibre Cement Boards upright with the help of another physically abled person

## PREPARING THE WALL

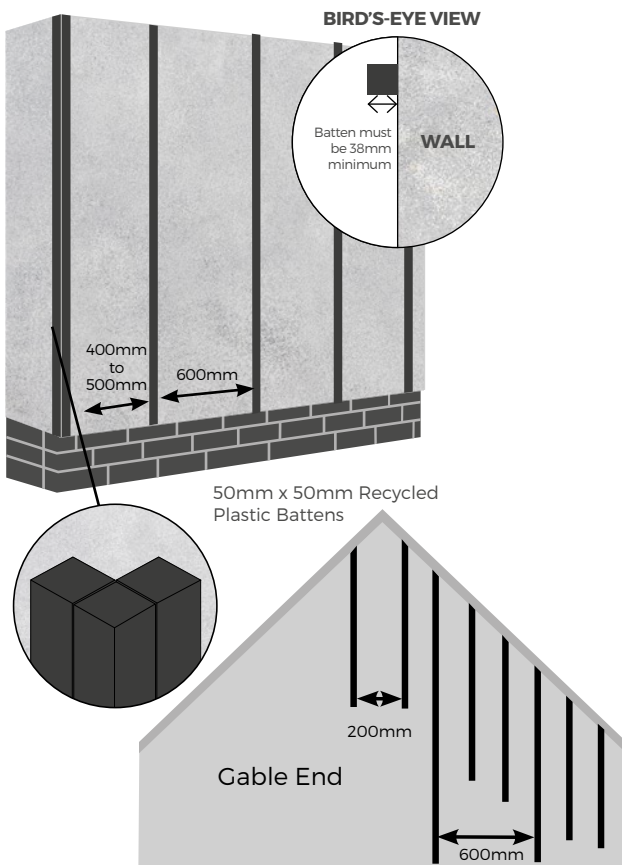

### STEP 1: BATTENS

**Install 50mm x 50mm Recycled Plastic Battens flush to the wall, creating a minimum 38mm ventilation gap between the wall and the Fibre Cement Cladding Boards.**


Battens must be no more than 600mm apart, reducing to 400mm or 500mm at boundary areas, and a clear space of 38mm should be left at the base of the Battens.

If your home has a gable end, Battens must be spaced up to 600mm apart with additional, shorter supporting Battens installed every 200mm between, going up and down the apex (the triangular shape of your gable end). This ensures the Boards are fully supported across the entire build.

Ensure all Battens are vertical and level using either a tape measure or a spirit level before moving on to the Trims and details.

**Please note:** the Damp Proof Course must be installed on any Battens around corners, or on any double Battens (where two Cladding Boards are butted together).

# INSTALLATION

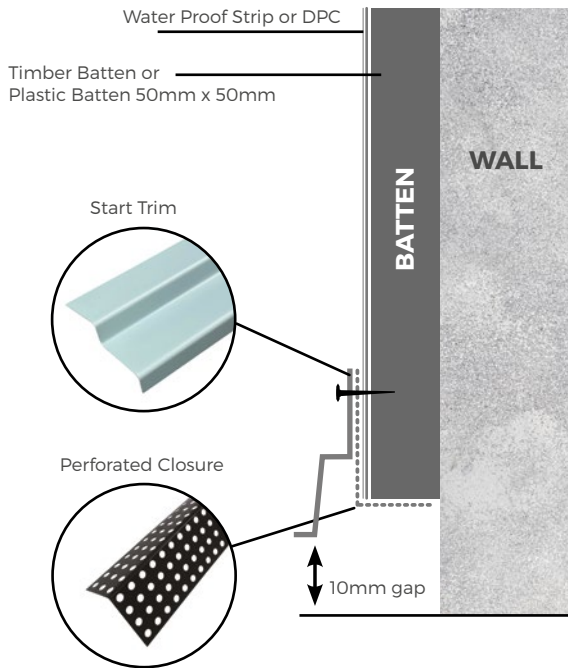


## STEP 2: CORNER TRIMS AND START TRIM

Once the Battens are installed a Water Proof Strip or DPC (Damp Proof Course) must be fitted to any Batten which will have a Corner Trim attached to it, or borders any windows or doors. Fix the DPC using a staple gun at regular intervals. Then, at the base of the Battens secure the Perforated Closure using 39mm Fibre Cement Screws.

Fix Corner Trims to the Battens, ensuring each Trim overlaps the Batten on either side by 10mm. Fix the Trim to the Batten using 39mm Fibre Cement Screws, at regular intervals until the Trim is secure.

Screw the Start Trim to the Batten, as per the diagram, only at the top of the Trim and through both the Batten and Perforated Closure at the base.

Ensure the lip of the Start Trim is just below the base of the Batten. Make sure there is a 10mm clearance between the base of the Trim and the base of the wall.

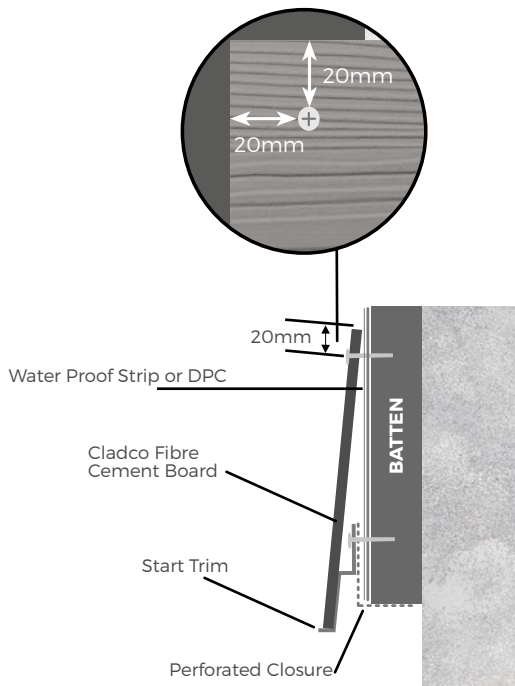

## STEP 3: FIXING THE FIRST BOARD



The first Board will be fixed to the side of the building using the attached Start Trim as a support.

Mark 180mm up from the base of the Start Trim and ensure it is level. This will be where the top of your first Board will sit.

Sit the Board securely onto the Start Trim and fix to the Battens behind with a 40mm Wood Screw. Screws should always be inserted at the top of the Board into the Battens.

There must be a 20mm clearance gap between the edge of the Board and each Screw.

# INSTALLATION

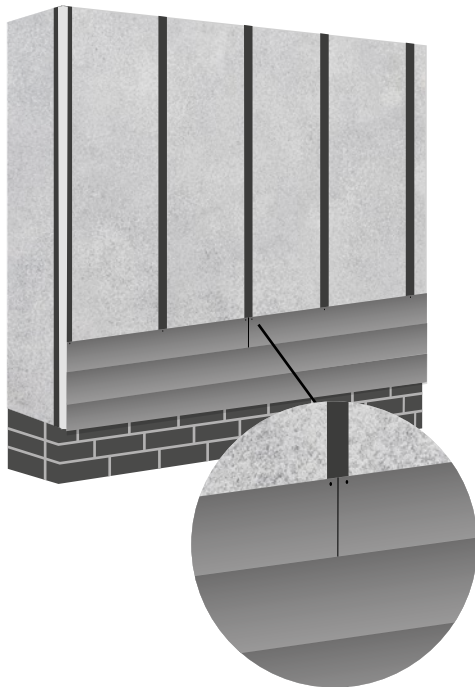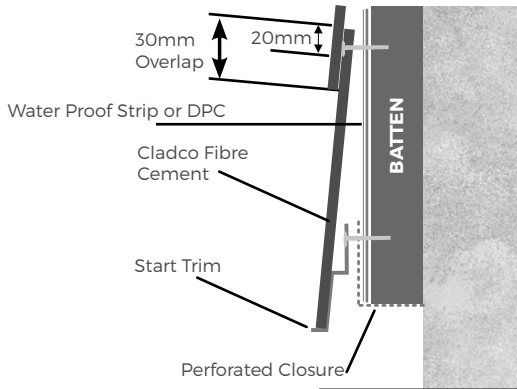

## STEP 4: FIXING THE REST OF THE BOARDS

Place your second Fibre Cement Wall Cladding Board so that the base of the Board overlaps the top of the first Board by a minimum of 30mm. The dimensions of the overlap must be maintained throughout the installation.

Insert 40mm Wood Screws through the top of the new Cladding Board into the Batten as before.

Once the Board has been secured, measure 180mm from the top of the Board to give the next Board's top rate edge height. This is to ensure that the correct gaps are being met throughout the installation. Install the rest of the Boards following this method.




**TOP TIP** To ensure coverage of your desired width, the Fibre Cement Wall Cladding Boards may need to be butted together. The Boards can be flush next to each other, as the Boards have a minimal expansion and contraction. When two Boards meet, they must be supported by two adjacent Battens behind.

The double Battens must both be fitted with a Damp Proof Course before the Boards are installed.

## STEP 5: INSTALLING YOUR LAST BOARD

It is unlikely that Boards will fit exactly to your wall height, and so it may be necessary to cut the last Board to the correct width. To ensure the Board is cut correctly, measure the distance from the top of the previous Cladding Board to the top of your wall, ensuring to include the 30mm overlap.

Leave enough space for a 10mm ventilation gap between the Boards and the underside of the soffit. Once the last Board is cut to size, install exactly as before using 39mm Fibre Cement Screws with colour-matching heads.

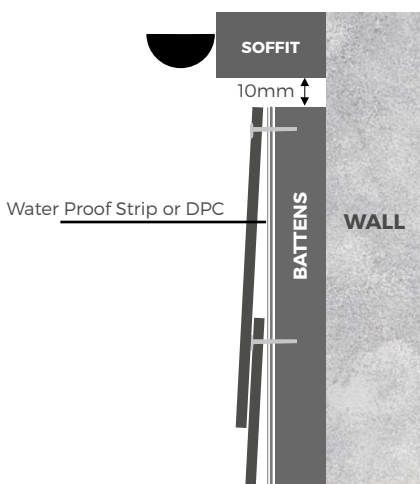

**TOP TIP** Check the installation with a spirit level every four rows to ensure the angle and level of each Board is maintained throughout.



# FINISHING AROUND DOORS AND WINDOWS


## WINDOWS AND DOORS

The Battens above the windows or doors will need to be installed as per Step One with the Perforated Closure cut to the same length as the top section of a window or door frame and installed underneath the Fibre Cement Cladding Boards above the windows or doors.

If Fibre Cement Wall Cladding Boards need to be trimmed and cut to fit around doors and windows, measure the space needed and cut the Boards to length. Be sure to wear a Level P3 Respiratory Protective Mask when cutting the Boards.

Before the Wall Cladding can be installed around any windows or doors, Asymmetric External Corner Trims must be fixed to the Battens, fitted using 39mm Fibre Cement Screws with colour-matching heads at regular intervals. If your doors, windows or walls require bespoke Trims, these are fitted here instead of the Asymmetric External Corner Trims.



Once installed correctly the Wall Cladding Boards can be fitted onto the Asymmetric External Corner Trims. Secure the cut-to-size Boards using 39mm Screws. If installing Boards into a window reveal, please refer to our Fibre Cement Trims Installation Guide for further detail.

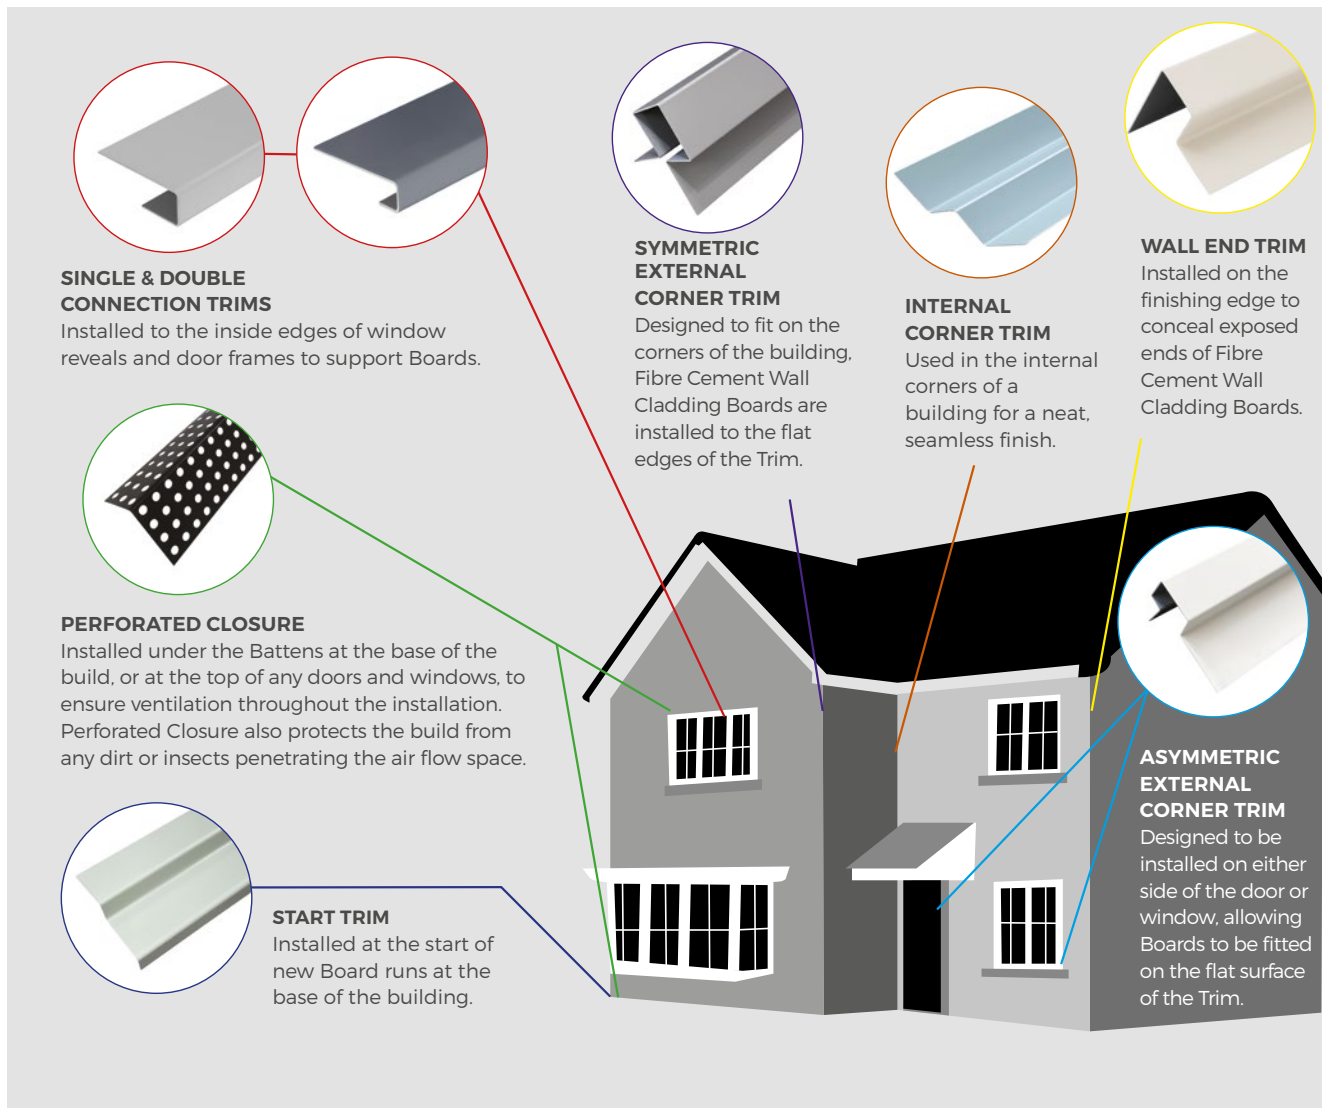

**IF YOU REQUIRE ADDITIONAL TRIMS AND FIXINGS FOR YOUR PROJECT, PLEASE SPEAK TO US FOR ASSISTANCE.**




# FIBRE CEMENT TRIMS

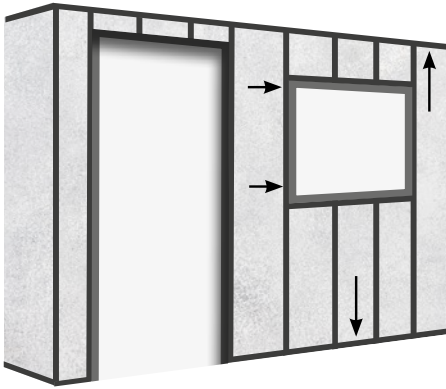

## STEP 1: INSTALL PERFORATED CLOSURES

Perforated Closure must be installed before the Trims. Start by measuring the width of the top and bottom of the walls and windows, as well as

the width of any doors. Cut the Perforated Closure to the correct lengths using Cladco Straight Cut Tin Snips. Using 39mm Fibre Cement Screws with colour-matching heads, fix the Perforated Closure onto the Battens along the top and bottom of the walls, windows and the top edge of any door frames.


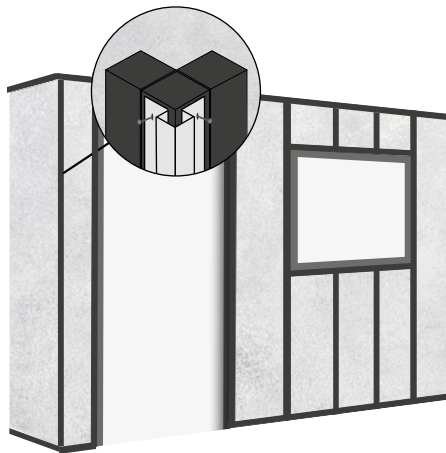


## STEP 2: MEASURE AND INSTALL CORNER TRIMS

Measure the height of all external and internal corners of your building, as well as the height of windows and doors.

Once measured, use Cladco Straight



Cut Tin Snips to cut the Symmetric Corner Trims (for external wall corners), Asymmetric External Corner Trims (for external window and door corners), and Internal Corner Trims (for internal wall corners) to the correct sizes. Use 39mm Screws to install each of the Corner Trims into place.

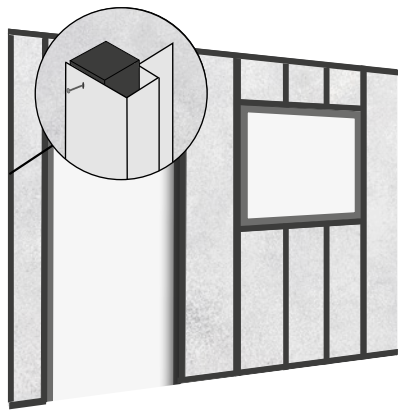

## STEP 3: MEASURE AND INSTALL WALL END TRIMS

Measure the height of the Battens along the outer edge of your Fibre Cement Wall Cladding installation and cut the Wall End Trims to matching

lengths. Fix the Wall End Trim on top of the Batten using 39mm Fibre Cement Screws with colour-matching heads before installing Boards.

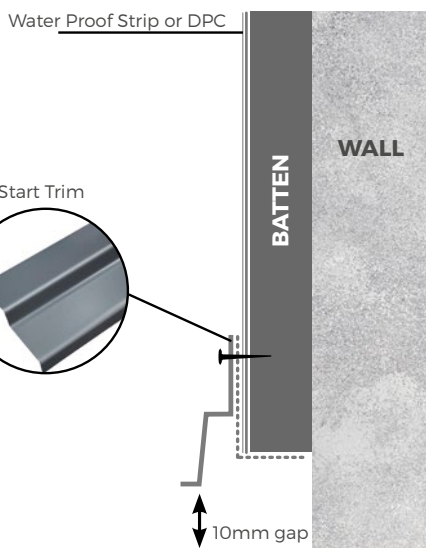


## STEP 4: INSTALL START TRIMS

Measure the length of the base of your wall and cut the Start Trim to the correct size using Cladco Straight Cut Tin Snips. Using 39mm

Screws, secure the Start Trim over the top of the Perforated Closure and overlap the External and Internal Corners Trims installed in the previous steps. Leave at least a 10mm gap from the base of the wall to the Start Trim.

# FIBRE CEMENT TRIMS


---

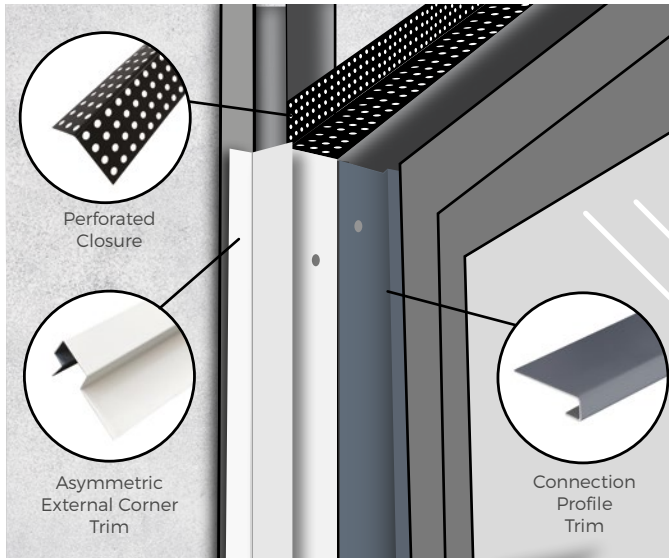

## WINDOW AND DOOR REVEALS

### STEP 1


Alongside the Asymmetric External Corner Trims previously installed around windows and doors, secure Connection Profile Trims to the internal corners of a window or door reveal using 39mm Screws, as shown in the diagram. Make sure that the small painted edge of the Connection Profile Trim sits neatly against the window or door frame.

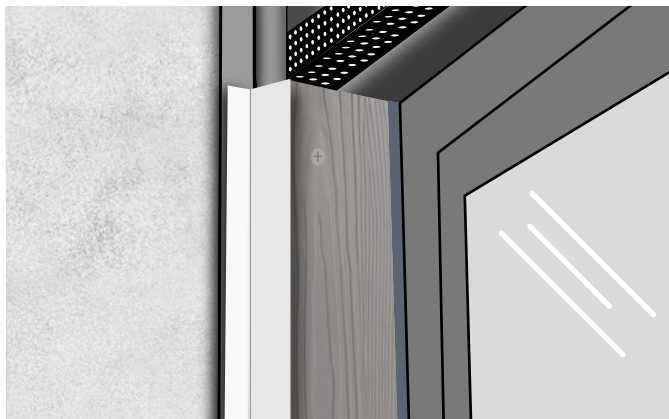

## FINISH WINDOW OR DOOR REVEALS

### STEP 2

Cladco Fibre Cement Boards can be cut to the same width as the window or door reveals using a wet saw and a Level P3 Respiratory Protective Mask. Slot the Board between the Connection Profile Trim and the Asymmetric External Corner Trim. Use 39mm Fibre Cement Screws with colour-matching heads to fix the Boards into place.

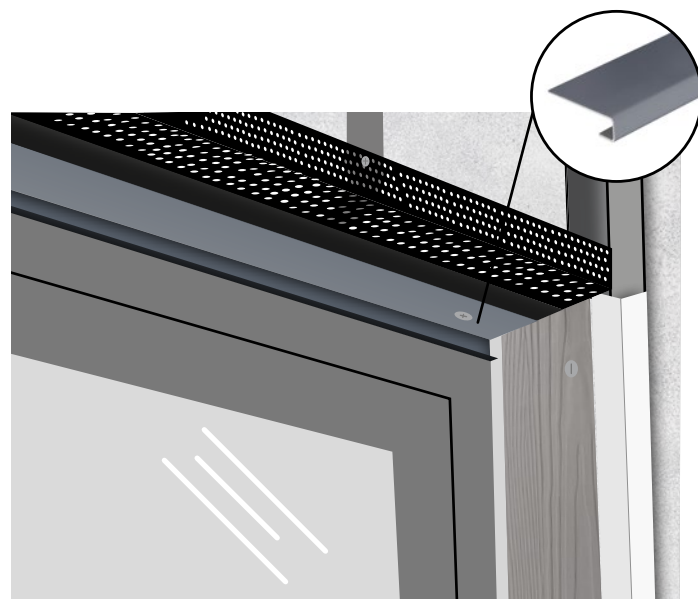


## TRIMS AROUND WINDOW HEADS

### STEP 3

Measure a Connection Profile Trim to fit the top internal corner of a window or door head. Cut the Connection Profile Trim using Cladco Straight Cut Tin Snips and secure into place using 39mm Screws. This will provide adequate support for the overhanging Fibre Cement Board under the window or door head.

# FIBRE CEMENT TRIMS


---

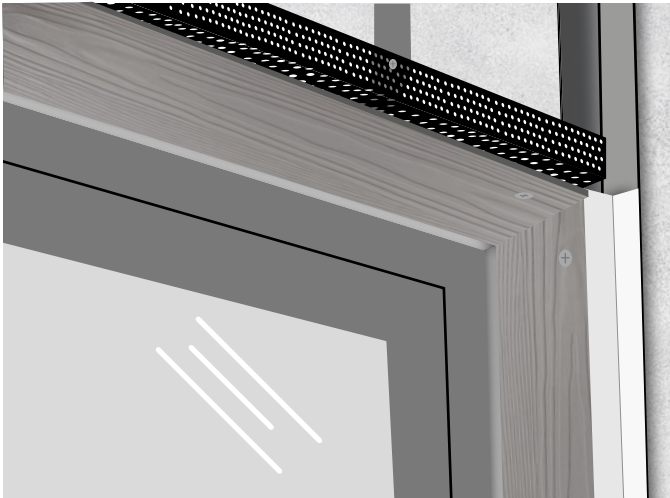

## TRIMS AROUND WINDOW HEADS

### STEP 4

Measure and cut the Fibre Cement Board in the same way as before and secure the Fibre Cement Board in place using 39mm Fibre Cement Screws with colour-matching heads. Make sure there is at least a 20mm gap between the edge of the Board and the Perforated Trim to allow for adequate airflow.

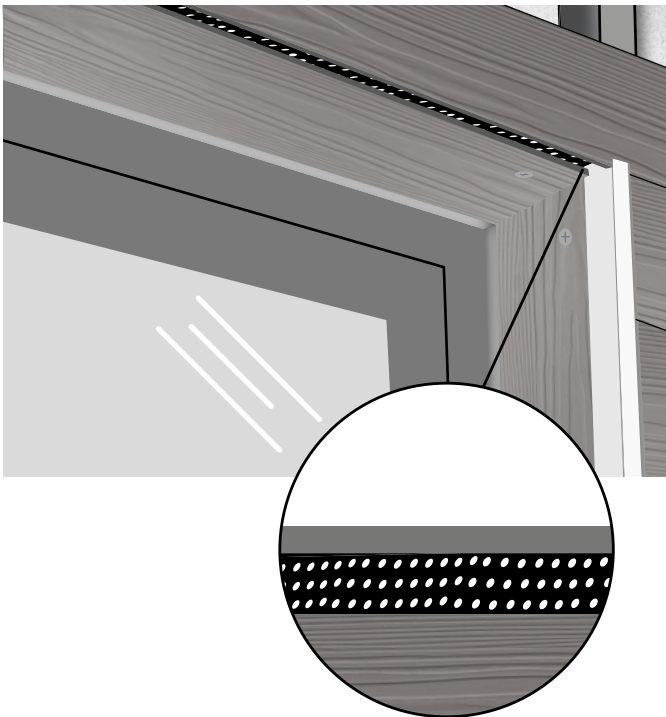

## FINISHING ABOVE WINDOWS OR DOORS

### STEP 5

Before installing the next Fibre Cement Board above a window or door frame, a section of the Board matching the width of the window or door frame will need to be measured and cut using a wet saw. Once cut, secure the Board in place using 39mm Screws into supporting Battens..

View from underneath showing 20mm visible gap for airflow

# AFTERCARE

---



## MAINTENANCE

Ensure your Boards are kept clear of debris and dirt by cleaning with lukewarm or cold water. A mild, household dish soap can be added for more stubborn stains such as bird droppings.

Mildew and algae are common to outdoor products but will not penetrate Fibre Cement Cladding Boards. Ensure the Boards are kept clean of dirt, pollution and other stains by checking them seasonally and giving them a quick clean when necessary.

Cladco Fibre Cement Wall Cladding Boards are painted using a paint-and-bake method to give them their durable properties and unique look. However, the Boards can be painted with a suitable outdoor paint for an alternative colour. If you are wishing to paint the Cladding Boards, it is recommended to purchase the Unpainted Fibre Cement Cladding Board.

Important – Do not use high-pressured cleaning systems on Cladco Fibre Cement Wall Cladding Boards as this may cause damage to the paint and finish of the Boards.



# FREQUENTLY ASKED QUESTIONS

---

## Where can I install my Fibre Cement Cladding Boards?

Fibre Cement Wall Cladding Boards can be installed on any interior or exterior surface with the correct support structure on garages, sheds, houses, or garden rooms.

## Can I use a pressure washer?

Pressure washers are not recommended to be used on Cladco Fibre Cement Wall Cladding Boards as the pressure could strip the Boards of their paint layers and properties.

Simply clean using lukewarm or cold water and light detergent with a cloth or soft brush.

## What is dimensionally very stable?

Cladco Fibre Cement Wall Cladding Boards, like any material exposed to sunlight over a prolonged period of time, will get warmer. Like most materials, when Cladco Fibre Cement Wall Cladding Boards change temperature, slight expansion or contraction within the Boards can occur. These changes are minimal compared to alternative products on the market.

## Can Cladco Fibre Cement Wall Cladding Boards be installed vertically?

Cladco Fibre Cement Cladding Boards cannot be installed vertically.

Fibre Cement Boards are designed to be installed horizontally using a feathering technique, giving your building an attractive finished appearance.

Installing the Boards vertically is not recommended by Cladco Profiles as detailed in Cladco Terms and Conditions.


## Can Cladco Fibre Cement Wall Cladding Boards be painted?

Cladco Fibre Cement Wall Cladding has been painted using a paint and bake method which gives the Boards increased durability and strength. Boards can either be painted an alternative colour (if you are doing this, we recommend purchasing the Unpainted Board) and can be touched up if necessary using Cladco Fibre Cement Touch Up Paint.

## Are the Boards scratch resistant?

Cladco Fibre Cement Wall Cladding Boards, thanks to their three layers of baked paint, have increased scratch resistance properties. The baked paint increases the Boards' durability, however Boards may still scratch if handled incorrectly.

## What colours are available?

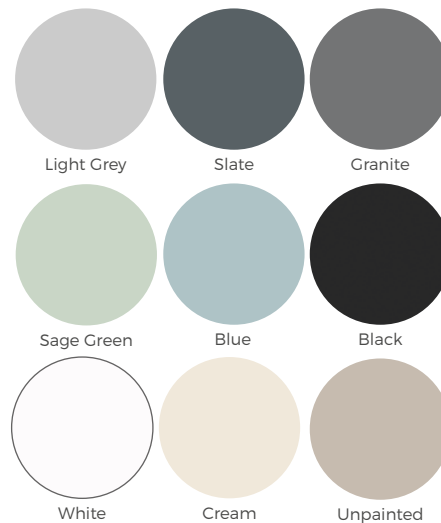

## Can I order a Sample?

Cladco Fibre Cement Wall Cladding Samples can be ordered via the website, or by contacting our friendly sales team on 01837 659901.

You can choose two of the nine available options above to sample. The Sample Swatches come with a Cladco Decking Brochure and a Price List.

## Why are white marks appearing on my Fibre Cement Cladding?

Efflorescence occurs naturally when moisture interacts with Fibre Cement products. Store Boards indoors and avoid installing when wet. Proper airflow and ventilation are essential to minimise this occurrence.



**Head Office**

Beardown Road  
Exeter Road Industrial Estate  
Okehampton  
Devon  
EX20 1UA

01837 659901

[info@cladco.co.uk](mailto:info@cladco.co.uk)

[www.cladcodecking.co.uk](http://www.cladcodecking.co.uk)

**CLADCO**  
PROFILES

Pictured - Cream Fibre Cement Wall Cladding Boards