

3M JOIST RECYCLED PLASTIC DECKING FRAME



Recycled Plastic Joists are produced using 100% post-consumer plastics, which are then shredded, melted and poured into moulds. Joists are available to order in black.



0mm

150mr

SPECIFICATIONS								
Each Joist measures	3000mm x 50mm x 150mm							
Each Joist weighs	19.5kg (approximately)							

Joists/Stringers	Max Spans (deflection mm)											
Load	Distributed load: 1.5kN/m2 Point Load 1.0kN				Distributed load: 3kN/m2 Point Load 1.5kN				Distributed load: 5kN/m2 Point Load 2.0kN			
Joist Centres	350mm	400mm			350mm			600mm	350mm			
50 x 50 Ultra		600				600				600		
50 x 75 Ultra												
50 x 100 Ultra		1250**	1250**	1250**		1200	1100	1000		1000	900	800
50 x 125 Ultra		1500**	1500**	1450**		1300	1200	1150		1100	1050	1000
50 x 150 Ultra		2000**	2000**	2000**		1800	1700	1600		1500	1400	1300
80 x 160		2000	1850**	1750**		2000	1850	1750		1700	1550	1450
80 x 230		2500**	2500**	2450		2500**	2500**	2450**		2400	2250	2100

**max span due to creep behaviour


*This warranty is provided by the supplier and not Cladco Profiles.

PLEASE NOTE - Images are used for illustration purposes only, actual item may vary slightly from the image supplied.



JOIST CENTRES

Cladco Recycled Plastic Joists require support every one metre for the Decking frame. When installing Composite Decking onto Recycled Plastic Joists, we advise 400mm centres. For Recycled Plastic Joists and Nordeck Decking installations, we advise 300mm centres. For more information on how to install correctly, consult our Installation Guides.

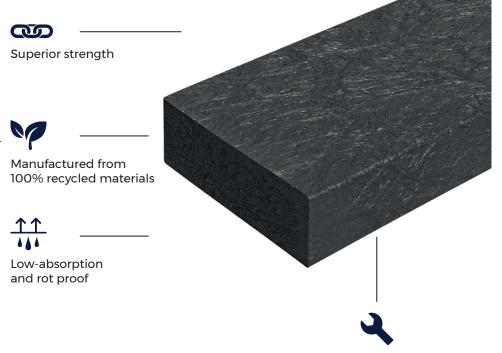

Use on concrete, grass or uneven ground



PRODUCT ACCESSORIES



RECYCLED PLASTIC POSTS



STARTER CLIPS



T-CLIPS FIXINGS



SKIRTING TRIM



HEAVY DUTY WEED MAT

PLEASE NOTE - Images are used for illustration purposes only, actual item may vary slightly from the image supplied.

www.cladcodecking.co.uk **T:** 01837 659901 **E:** info@cladco.co.uk

